

# New Fluke 289

True-rms Industrial Logging  
Multimeter with TrendCapture


FLUKE®

## Specifications

Function	Range and Resolution	Basic Accuracy
DC volts AC volts	50.000 mV, 500.00 mV, 5.0000 V, 50.000 V, 500.00 V, 1000.0 V	0.025 % 0.4 % (true-rms)
DC current AC current	500.00 $\mu$ A, 5000.0 $\mu$ A, 50.000 mA, 400.00 mA, 5.0000 A, 10.000 A	0.15 % 0.7 % (true-rms)
Temperature (excluding probe)	-200.0 °C to 1350.0 °C (-328.0 °F to 2462.0 °F)	1.0 %
Resistance	50.000 $\Omega$ , 500.00 $\Omega$ , 5.0000 k $\Omega$ , 50.000 k $\Omega$ , 500.00 k $\Omega$ , 5.0000 M $\Omega$ , 50.00 M $\Omega$ , 500.0 M $\Omega$	0.05 %
Capacitance	1.000 nF, 10.00 nF, 100.0 nF, 1.000 $\mu$ F, 10.00 $\mu$ F, 100.0 $\mu$ F, 1000 $\mu$ F, 10.00 mF, 100 mF	1.0 %
Frequency	99.999 Hz, 999.99 Hz, 9.9999 kHz, 99.999 kHz, 999.99 kHz	.005 %



Additional Functions/Features	Fluke 289
Multiple on screen displays	Yes
True-rms ac bandwidth	100 kHz
dBV/dBm	Yes
DC mV resolution	1 $\mu$ V
Megohm range	up to 500 M $\Omega$
Conductance	50.00 nS
Continuity beeper	Yes
Battery/fuse access	Battery/fuse
Elapse time clock	Yes
Time of day clock	Yes
Min-max-avg	Yes
Duty cycle	Yes
Pulse width	Yes
Isolated optical interface	Yes
Auto/touch hold	Yes
Reading memory	Yes
Log to PC	Yes
Interval/event logging	Yes
Logging memory	up to 10,000 readings

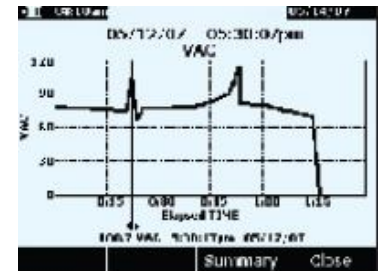

TrendCapture displays vAC logged data.

## General specifications

**Maximum voltage between any terminal and earth ground:** 1000 V

**Battery type:** 6 AA alkaline batteries, NEDA 15A IEC LR6

**Battery life:** 100 hours minimum, 200 hours in logging mode

**Temperature:**  
Operating: -20 °C to 55 °C  
Storage: -40 °C to 60 °C

**Relative humidity:** 0 to 90 % (0 to 37 °C), 0 to 65 % (37 °C to 45 °C), 0 to 45 % (45 °C to 55 °C)

**Electromagnetic compatibility:** EMC EN61326-1

**Vibration:** Random vibration per MIL-PRF-28800F Class 2

**Shock:** 1 meter drop per IEC/EN 61010-1 2nd Edition

**Size (HxWxD):** 22.2 cm x 10.2 cm x 6 cm (8.75 in x 4.03 in x 2.38 in)

**Weight:** 870.9 g (28 oz)