


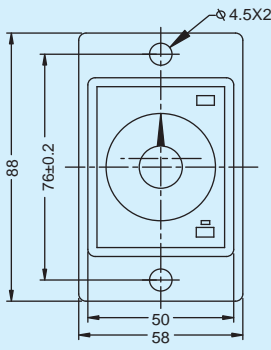
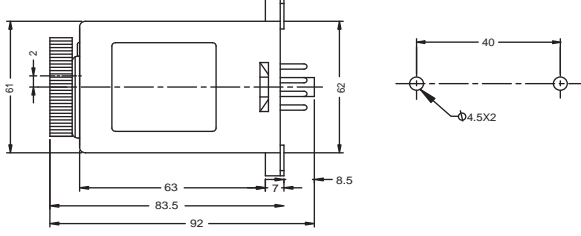
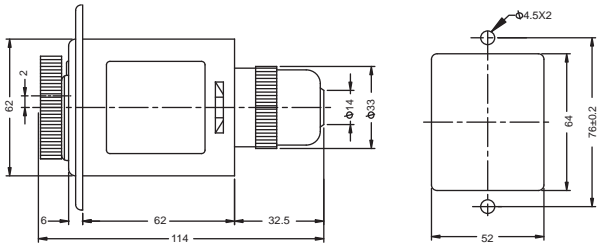

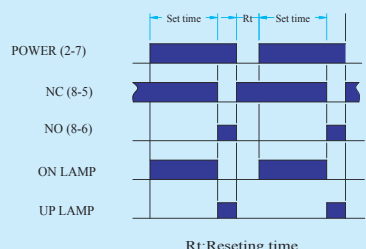
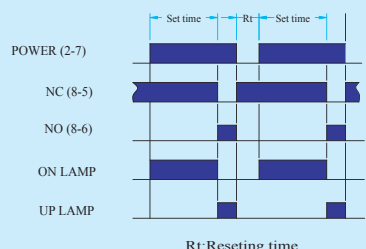

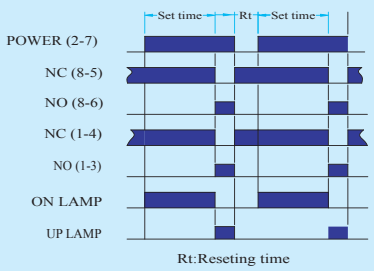

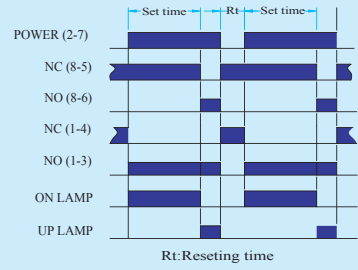


TIMER 限時繼電器

AH2-N□		AH2-Y□	
DIMENSIONS(mm) 尺寸		DIMENSIONS(mm) 尺寸	
61H×49W×70D		88H×58W×68D	
			
SURFACE(-N) 露出型		FLUSH(-Y) 埋入型	
8PFA		US-08, P3G-08	
			
FULL TIMING RANGE 時間範圍		AH2-N1/Y1 限時 1C 5A	
SEC: 1, 3, 6, 10, 30, 60 MIN: 3, 6, 10, 30, 60 H R: 3, 6, 10, 24		 	
RATED VOLTAGE 額定電壓		POWER (2-7)	
DC(V): 12, 24 AC(V): 12, 24, 48, 110, 220, 240 380, 415, 440, 50/60Hz			
INDICATOR OPERATING 指示燈動作		NC (8-5)	
ON-UP Two indicator lamp ON-UP 兩只指示燈		NO (8-6)	
L I F E	MECHANICAL 機械	ON LAMP	
	ELECTRICAL 電氣	UP LAMP	
A C C U R A C Y	REPEAT ERROR 往復誤差	Rt: Resetting time	
	SETTING ERROR 設定誤差	AH2-N/Y 限時 2C 5A	
	VOLTAGE ERROR 電壓誤差	 	
	TEMP. ERROR 溫度誤差	POWER (2-7)	
RESET TIME 複歸時間		NC (8-5)	
0.1 sec max		NO (8-6)	
CONSUMED POWER 消耗功率		NC (1-4)	
3VA		NO (1-3)	
AMBIENT TEMPERATURE 使用周圍溫度		ON LAMP	
-10°C ~ +55°C		UP LAMP	
AMBIENT HUMIDITY 使用周圍濕度		Rt: Resetting time	
45~85%RH		AH2-N/Y 限時 1C 5A, 瞬時 1C 5A	
WEIGHT 重量		 	
220g		POWER (2-7)	
		NC (8-5)	
		NO (8-6)	
		NC (1-4)	
		NO (1-3)	
		ON LAMP	
		UP LAMP	
		Rt: Resetting time	