
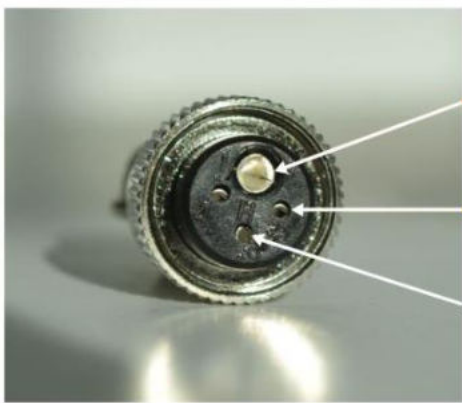


## <DGT-025SIH>

Item (Model Name)	DGT-025SIH
Major Fluids	ALL Fluids (Some special chemical products are exception.)
Accuracy (Standard Installation Position)	±0.5%
Maximum Working Pressure	15MPa
Fluid & Ambient Temperature	-40 to150°C
Flow-Rate Range (±1%)	400 – 5,000 L/H
Pulse Unit	98.8 P/liter 0.010123 liter/P
Power Voltage	3~24V DC, Max 60mA
Output Signal	NPN Open Collector
Connection	PT 1" (External Thread)
Main Materials	Rotor & Casing : 316L Stainless Steel
	O-ring : Viton
	Shaft : 316L Stainless Steel
WIRE	BLACK(-) GROUND
	ORANGE(+) POWER
	YELLOW(-) SIGNAL

Product's Picture	Wire Connecting Methods
	 <ol style="list-style-type: none"> <li>1. ORANGE(+) POWER</li> <li>2. YELLOW(-) SIGNAL</li> <li>3. BLACK(-) Ground</li> </ol>

### \*Caution\*

**Please make sure to install strainer in front of flow sensor.**

