



Contactor relay, 55E, EN 50011, 5 NO + 5 NC, screw terminal, DC operation, 220 V DC

<b>product designation</b>	Auxiliary contactor
<b>product type designation</b>	3TH4
<b>size of contactor</b>	0
<b>reference code according to IEC 81346-2</b>	K
<b>Substance Prohibitance (Date)</b>	03/01/2017
ambient temperature during operation	-25 ... +55 °C
<b>type of voltage of the control supply voltage</b>	DC
<b>control supply voltage at DC</b>	
• rated value	220 V
<b>number of NC contacts for auxiliary contacts</b>	5
• delayed switching	0
• lagging switching	0
• make-before-break switching	0
<b>number of NO contacts for auxiliary contacts</b>	5
• delayed switching	0
• leading contact	0
• make-before-break switching	0
number of CO contacts for auxiliary contacts	0
<b>identification number and letter for switching elements</b>	55 E
<b>operational current at AC-15</b>	
• at 230 V rated value	10 A
• at 400 V rated value	6 A
<b>fastening method</b>	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022
<b>height</b>	78 mm
<b>width</b>	55 mm
<b>depth</b>	135 mm
type of electrical connection for auxiliary and control circuit	screw-type terminals
<b>Safety related data</b>	
B10 value with high demand rate according to SN 31920	1 000 000; With 0.3 x I <sub>e</sub>
T1 value for proof test interval or service life according to IEC 61508	20 a
<b>protection class IP on the front according to IEC 60529</b>	IP00
<b>Further information</b>	
<b>Information on the packaging</b>	
<a href="https://support.industry.siemens.com/cs/ww/en/view/109813875">https://support.industry.siemens.com/cs/ww/en/view/109813875</a>	
<b>Information- and Downloadcenter (Catalogs, Brochures,...)</b>	
<a href="https://www.siemens.com/ic10">https://www.siemens.com/ic10</a>	
<b>Industry Mall (Online ordering system)</b>	
<a href="https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfib=3TH4355-0BM4">https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfib=3TH4355-0BM4</a>	
<b>Cax online generator</b>	

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TH4355-0BM4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TH4355-0BM4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3TH4355-0BM4&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TH4355-0BM4&lang=en)

Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3TH4355-0BM4/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TH4355-0BM4&objecttype=14&gridview=view1>

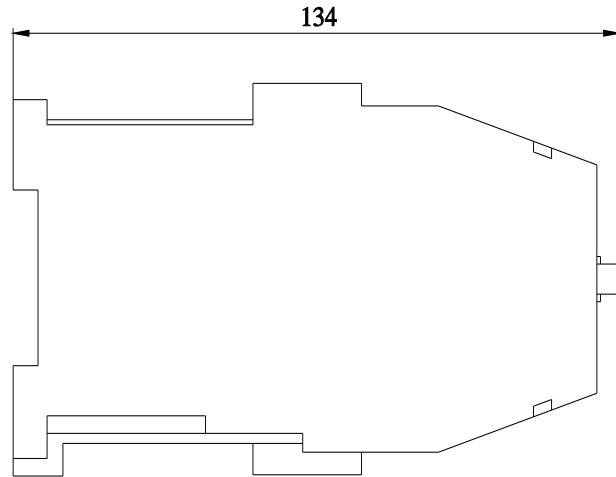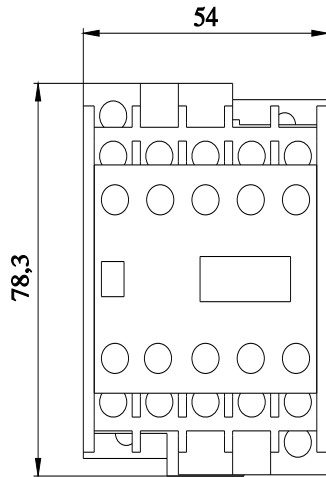

last modified:

11/21/2022 